

InteliLite®

AMF 20/AMF 25

Automatic Mains Failure Controller



Description

InteliLite® AMF 20 and InteliLite® AMF 25 are new integrated controllers for gen-sets operating in single standby mode. They meet all possible requirements for AMF applications, including modem control, user configuration and full gen-set monitoring and protection.

InteliLite® controllers are equipped with a powerful graphic display. Icons, symbols and bar graphs for intuitive operation together with high functionality set new standards in gen-set control.

Special low temperature (IL-AMF 20-LT or IL-AMF 25-LT) version is also available, allowing the display to work up to -30°C.

Features

- Support of engines equipped with Electronic Control Unit (J1939 interface)
- Comprehensive diagnostic messages; SPN/FMI codes; KWP2000 support
- Automatic or manual start/stop of the gen-set
- Push buttons for simple control, lamp test
- Graphic back-lit LCD display 128x64 pixels
- 6 LED indicators
- Parameters adjustable via keyboard or PC
- Mains measurements (50/60 Hz): U1-U3, Hz
- Generator measurements (50/60 Hz): U1-U3, I1-I3, Hz, kW, kVA, kWh
- Selectable protections alarm/shutdown
- 3 phase Generator protections
 - Over-/under voltage
 - Over-/under frequency
 - Current/voltage asymmetry
 - Overcurrent/overload
- 3 phase AMF function
 - Over-/under frequency
 - Over-/under voltage
 - Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface (AT-LINK CONV cable is necessary for IL-AMF 20)
- Modem communication support (IL-AMF 25 only)
- Dimensions 180x120 mm (front panel)
- Sealed to IP65


Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- Perfect price/performance ratio



InteliLite[®] AMF 20/AMF 25

Automatic Mains Failure Controller

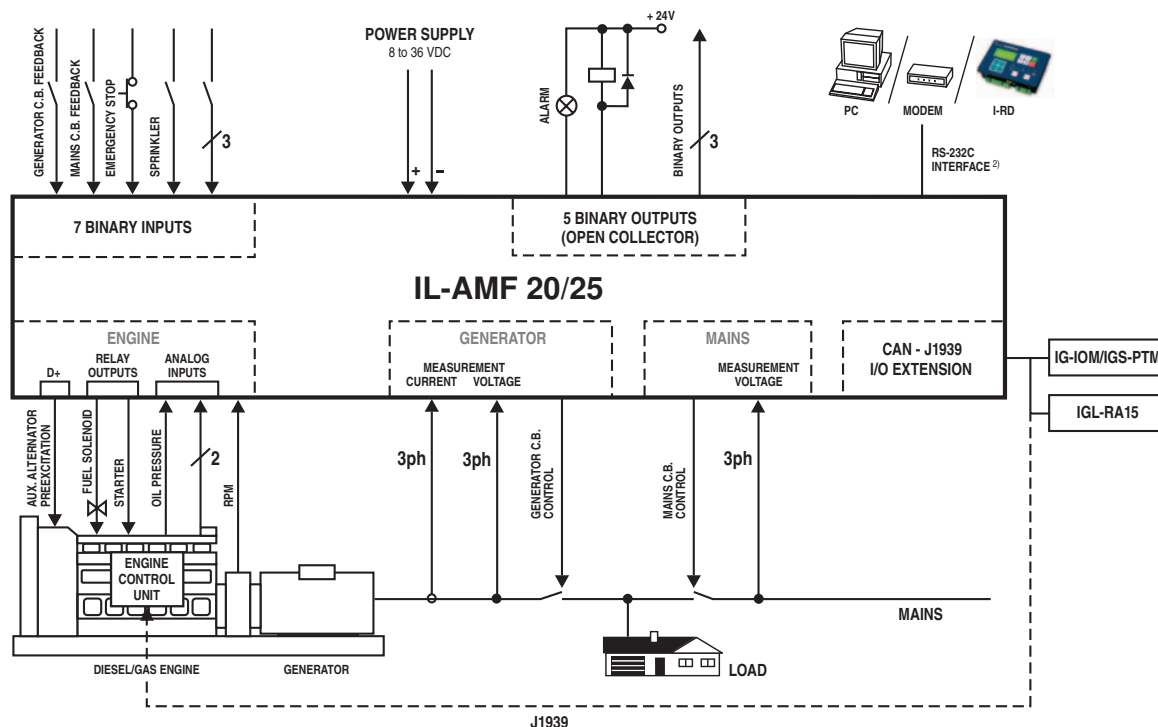

The Chart of Functions of InteliLite[®] Controllers

FUNCTIONS/CONTROLLERS	IL-AMF 20	IL-AMF 25	IL-MRS 10	IL-MRS 15	IL-MRS 11	IL-MRS 16
Binary inputs/outputs	7 / 7	7 / 7	6 / 6	6 / 6	6 / 6	6 / 6
Analog inputs	3	3	3	3	3	3
Pick-up	•	•	•	•	•	•
AMF function	•	•	-	-	-	-
Input configuration	•	•	•	•	•	•
Output configuration	•	•	•	•	•	•
Voltage measurement Gen./Mains	3ph / 3ph	3ph / 3ph	3ph / -	3ph / -	3ph / -	3ph / -
Current measurement	3ph	3ph, IDMT overcurrent	3ph	3ph, IDMT overcurrent	3ph	3ph, IDMT overcurrent
kWh/kWh measurement	• / -	• / •	• / -	• / •	• / -	• / •
GCB/MCB control with feedback	• / •	• / •	- / -	- / -	• ¹⁾ / -	• / -
Extension units (periph.)	-	IGL-RA15, IG-IOM, IGS-PTM	-	IGL-RA15, IG-IOM, IGS-PTM	-	IGL-RA15, IG-IOM, IGS-PTM
Communication interfaces	RS232 ²⁾	RS232, CAN ³⁾	RS232 ²⁾	RS232, CAN ³⁾	RS232 ²⁾	RS232, CAN ³⁾
Modem support	-	•	-	•	-	•
Battery charging alternator circuit	•	•	•	•	•	•

Key: • included; - excluded
 1) GCB control, but without feedback
 2) For IL-AMF 20, IL-MRS 10/11 AT-LINK CONV cable necessary
 3) CAN for periph.

Legend: IG-IOM/IGS-PTM: I/O extension modules
 IGL-RA15: Remote annunciator
 I-RD: Remote display



Manufacturer:
ComAp, spol. s r.o.
 Czech Republic
 Phone: +420 266 790 611
 Fax: +420 266 316 647
 E-mail: info@comap.cz
 Internet: www.comap.cz

Local Distributor/Partner
 Power Drive Systems
 Generator Control Specialists
 PO Box 30
 Grange Qld 4051
 Ph 0500 800 225
 Fx 07 3350 1654