


FR+LUB Skillair® 100-200-300

TECHNISCHE DATEN		FR+L 100	FR+L 200	FR+L 300
Anschluss		1/4" 3/8"	1/4" 3/8" 1/2"	1/2" 3/4" 1"
Druckbereich		0-8 / 0-12	0-8 / 0-12	0-8 / 0-12
Filterfeinheit			5µm 20µm 50µm	
Eingangsdruck Max.	MPa	1.5	1.3	1.3
	bar	15	13	13
	psi	217	188	188
Durchfluss bei 6.3 bar	NI/min	300	1200	2300
ΔP 0.5 bar	scfm	11	43	82
Durchfluss bei 6.3 bar	NI/min	800	2400	4000
ΔP 1 bar	scfm	28	85	142
Medium			Druckluft	
Temperatur Max.	°C	50	50	50
bei 10 bar	°F	122	122	122
Gewicht	Kg	0.7	1.35	2.7
Schrauben Wandbefestigung		M4x50	M4x60	M5x70
Hinweis	Der maximale Eingangsdruck für die Ausführung RA Automatikablass darf 10 bar nicht überschreiten.			



ABMESSUNGEN	FR+LUB 100		FR+LUB 200			FR+LUB 300		
ANSCHLUSS G	G 1/4	G 3/8	G 1/4	G 3/8	G 1/2	G 1/2	G 3/4	G 1"
A	121		149			175		177
B	199		245				278	
C	50		63				72	
E	106		134				157	
F	26		36				42	
L	M4 geeignet		M5 geeignet				M5 geeignet	

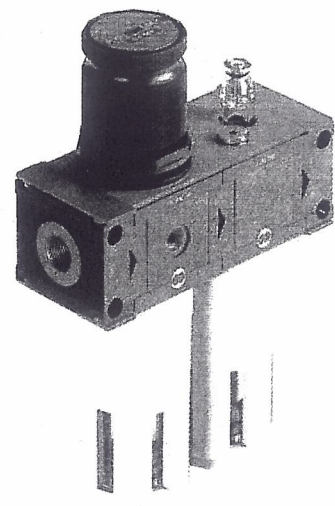